## STANDARD CLEMAN® RISER

# ADJUSTMENT IN HEIGHT FROM 28 TO 230 mm













**DNC 28/40** 

DNC 40/55

DNC 55/80


DNC 80/130

DNC 130/230

### **TECHNICAL DETAILS**

## PACKING

DNC 28/40	DNC 40/55	DNC 55/80	DNC 80/130	DNC 130/230
Box of 20 parts				Box of 8 parts

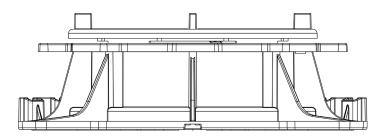

> Material : recycled polypropylene

Colour : black, blue nutSpacers thickness : 4 mm

› Basis dimensions : 192 mm x 192 mm› Support surface diameter : 138 mm

Resistant to extreme temperature from -30°C to +60°C

) UV and FROST resistant

Resistance to crushing test exceeds 1 T

### **APPLICATIONS**

To create terraces and patios with paving, ceramics, tiles, concrete slabs.



### **BENEFITS**

- Precise adjustments : riser can be either handly adjusted or with the JOUPLAST® adjusting wrench.
- › Performed lateral solution : 2 lateral integrated riser supports.
- › Optimized stability : all riser elements are mutually integrated.
- > Spacers can be split easily
- Cleman® accessories: 60 mm extension, side finishing plate, adjustment key and driver bit.

## RECOMMANDATIONS

- > Terraces and patios for pedestrian use only.
- Outdoor only.
- > Ceramic/Porcelain paving T7, T11 or F+ standard.
- $\rightarrow$  CLEMAN® 28/40 mm : Not suitable with side finishing plate.

Document protected by copyright. Any reproduction, copy, extraction, reuse in others publications, translation or adaptation, display, distribution or modification, in whole or in part, without the written consent of TMP CONVERT is strictly prohibited and will be sanctioned. TMP CONVERT reserves the right to add, modify or delete information to any time without warning.



