



GREENPLAC®

Jouplast®

GRASS STABILIZATION TILE



TECHNICAL DATA SHEET



BENEFITS

- Promotes strong roots system.
- Ensures rapid drainage of rainwater.
- Integrated assembly system prevents mats from separating.
- Integrated anchoring and interlocking system.
- Can be installed on slope up to 15% for traffic areas.
- Slip resistant.
- The option to use zone markers.

APPLICATIONS


- Makes green spaces vehicle friendly by strengthening and protecting the grass without compromising drainage.
- Ideal for parking place, bicycle path, access for fire fighting vehicles [tanker,...], access ways for rescue vehicles, emergency areas, terrace, Camping / caravan sites, environmental protection (against erosion, rivers...), walkways...for private or public use, industrial or commercial area.
- Perfect for equestrian and agricultural floors, even for agricultural machinery.

RESISTANCE

- Compression resistance: 600 T/m² (with grass).

RECOMMENDATIONS

- For best results, choose a grass variety suited to your application.
- Suitable with the zone markers references IURBBOUCBL40000 & IURBBOUCNR50000. Count 2.2 zone markers per m² (quantity to be adapted according the environment and the site).
- Do not use with hot mixed asphalt.
- For IFU, see the website.

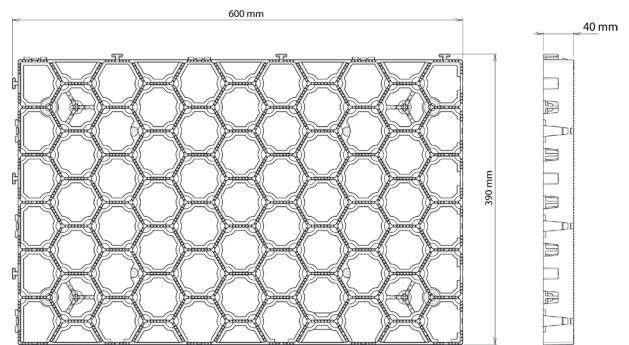

TECHNICAL DETAILS

- Material: recycled polyethylene
- Colour: green
- Usable dimensions: 591 mm x 378 mm x 40 mm *
- Usable area: 0.2234 m² [4.4763 tiles per 1 m²]
- Overall dimensions: 600 mm x 390 mm x 40 mm *
- Wall thickness: 3 mm
- Weight: 0.890 kg ie 3.80 kg/m²
- Cell structure: hexagonal (honeycomb) / internal diameter: 60 mm
- Anchoring pins: 4 - Length: 3 cm
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

PACKING

- Pallet of 104 parts / 23.2336 m² per pallet / Tiles are assembled by 4 [Stackable]

Document protected by copyright. Any reproduction, copy, extraction, reuse in others publications, translation or adaptation, display, distribution or modification, in whole or in part, without the written consent of TMP CONVERT is strictly prohibited and will be sanctioned. TMP CONVERT reserves the right to add, modify or delete information to any time without warning.



www.jouplast.com



*Manufacturing tolerance: +/- 2%

FT_GREE_2412_EN