




Jouplast®

PLOGOM®

## 10 MM FIXED SUPPORT FOR CERAMIC TILES FLEXIBLE MATERIAL - «ESSENTIAL» RANGE

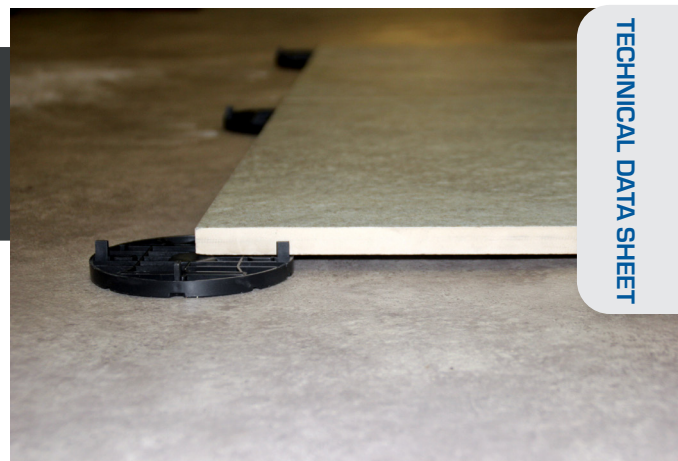

TECHNICAL DATA SHEET



### BENEFITS

- Rot-proof.
- Compensates for the roughness of the ground, and for 1-2 mm unevenness.
- Material preventing slipping.
- Divisible spacers for staggered laying (using a tool).

### APPLICATIONS


- 10 mm flexible support for dry installation of 20 mm ceramic slabs on concrete.
- Ideal for renovating.
- Ideal for creating paved or ceramic tiled outdoor terraces for pedestrian use only.

### RESISTANCE

- Resistance to crushing test exceeds 1T.

### RECOMMENDATIONS

- Terraces and patios for pedestrian use only.
- Outdoor use only.
- To be placed directly on a concrete slab, a tiled terrace, lean screed...
- Not suitable for unfinished, loose ground.
- For non-adhesive installation.
- Always follow paving manufacturer recommendations to ensure the suitability of paving products for use with riser pedestals and the number of risers per m<sup>2</sup> to use. Qualification of compulsory "SELF-SUPPORTING" slabs, of class T7, T11 according to standard EN 1339:2004-02.
- If you need an extension, use our HD10 mm product.



### TECHNICAL DETAILS

- Material: TPE (ThermoPlastic Elastomer)
- Colour: black
- Diameter: 120 mm
- Height: 10 mm
- Spacers: height: 10 mm / Thickness : 3 mm / Qty : 4
- Weight: 53 g
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

### PACKING

- Box of 60 parts (48 boxes per pallet)
- Box of 5 bags of 10 parts (48 boxes per pallet)

Document protected by copyright. Any reproduction, copy, extraction, reuse in others publications, translation or adaptation, display, distribution or modification, in whole or in part, without the written consent of TMP CONVERT is strictly prohibited and will be sanctioned. TMP CONVERT reserves the right to add, modify or delete information to any time without warning.



www.jouplast.com



FT\_DNC2840\_2304\_EN