



Jouplast®

DECKING RISER PEDESTAL

ADJUSTMENT IN HEIGHT FROM 20 TO 30 MM
«ESSENTIAL» RANGE



BENEFITS

- Quick and easy installation.
- Precise height adjustment using the rotating nut: no additional tools required.

APPLICATIONS


- Ideal for creating natural wooden or composite decking for pedestrian use only.

RESISTANCE

- Resistance to crushing test exceeds 1T.

RECOMMENDATIONS

- For pedestrian use only.
- Outdoor use only.
- The sub frame must be constructed using wooden or metallic material only (not composite).
- HL 20/30 mm decking riser is not compatible with 60 mm extension.
- Decking riser pedestals should be used only on stabilised ground or on existing concrete support.
- When the riser pedestal is used at its highest position, we recommend adding a 10 mm extension to provide greater flexibility during adjustment.
- For IFU, see the website.

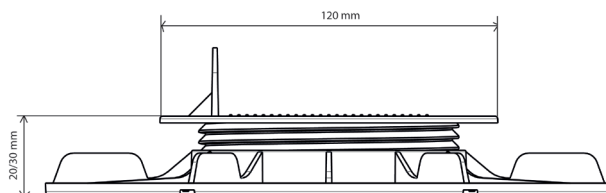

TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: black
- Adjustable height: mini: 20 mm / maxi: 30 mm
- Basis diameter: 208 mm / Bearing contact area: 300 cm²
- Support surface diameter: 120 mm / Bearing contact area: 100 cm²
- Vertical lug height: 25 mm
- Weight: 154 g
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

PACKING

- Box of 60 parts (25 boxes per pallet)
- Box of 6 bags of 12 parts (12 boxes per pallet - Stackable)