



# SELF LEVELLING RISER PEDESTAL

## ADJUSTMENT IN HEIGHT FROM 65 TO 95 MM «ESSENTIAL» RANGE



TECHNICAL DATA SHEET



### BENEFITS

- Compensates and/or creates slopes of up to 5% on uneven ground.
- Pivoting head.
- Adapts to the irregularities of the ground.
- Divisible spacers for staggered laying.
- Base shape optimised: makes it easy to lay paving against a wall or in a corner.

### APPLICATIONS


- Ideal for creating paved or ceramic tiled outdoor terraces for pedestrian use only.
- The self-levelling riser is designed to accommodate differences in the surface below the pedestal, automatically correcting differences in height of up to 5% and irregularities in compacted hardcore.
- Can be used to create - or compensate for - slopes of up to 5% on uneven ground.

### RESISTANCE

- Resistance to crushing test exceeds 1T.

### RECOMMENDATIONS

- Terraces and patios for pedestrian use only.
- Outdoor use only.
- Always follow paving manufacturer recommendations to ensure the suitability of paving products for use with riser pedestals and the number of risers per m<sup>2</sup> to use. Qualification of compulsory "SELF-SUPPORTING" slabs, of class T7, T11 according to standard EN 1339:2004-02.
- Not compatible with 25 mm extension. Not compatible with the side finishing plate.
- When the riser pedestal is used at its highest position, we recommend adding a 10 mm extension to provide greater flexibility during adjustment.
- When the riser pedestal is used at its lowest position, we recommend using the rised pedestal of the next size down, adding a 10 mm extension for greater flexibility when adjusting.
- Acoustic rubber cushion not included.

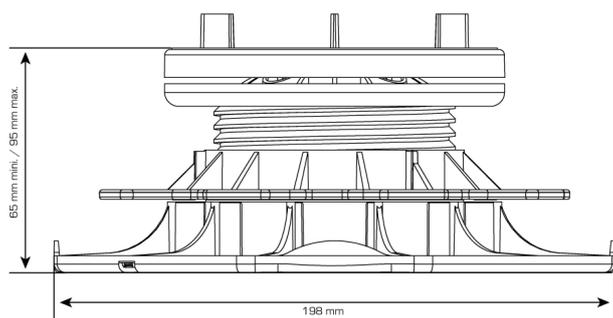

### TECHNICAL DETAILS

- Material: recycled polypropylene
- Colour: black, grey nut
- Adjustable height: mini.: 65 mm / maxi.: 95 mm
- Spacer: height: 9 mm / thickness: 3 mm / qty: 4
- Basis diameter: 198 mm / Bearing contact area: 300 cm<sup>2</sup>
- Support surface diameter: 120 mm / Bearing contact area: 100 cm<sup>2</sup>
- Weight: 298 g
- Resistance to temperature from -30°C to +60°C
- UV and frost resistant

### PACKING

- Bag of 60 parts (12 bags per pallet)

Document protected by copyright. Any reproduction, copy, extraction, reuse in others publications, translation or adaptation, display, distribution or modification, in whole or in part, without the written consent of TMP CONVERT is strictly prohibited and will be sanctioned. TMP CONVERT reserves the right to add, modify or delete information to any time without warning.



www.jouplast.com



FT\_HAB595\_2402\_EN